
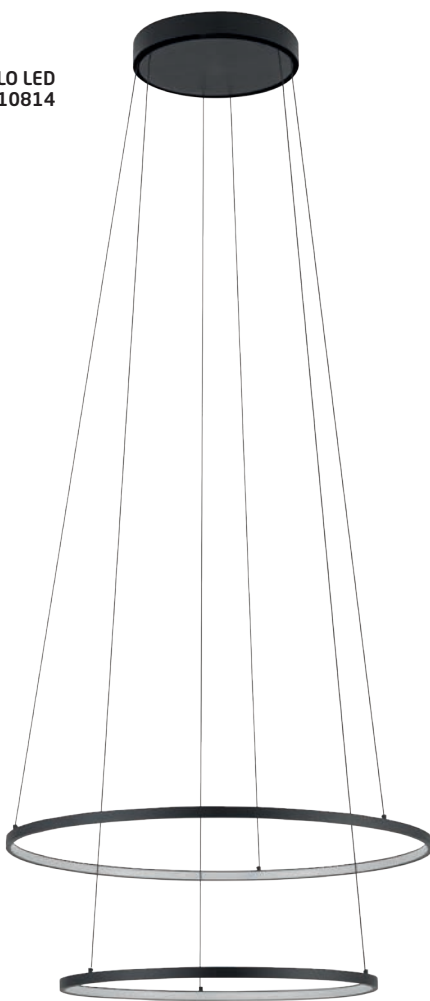
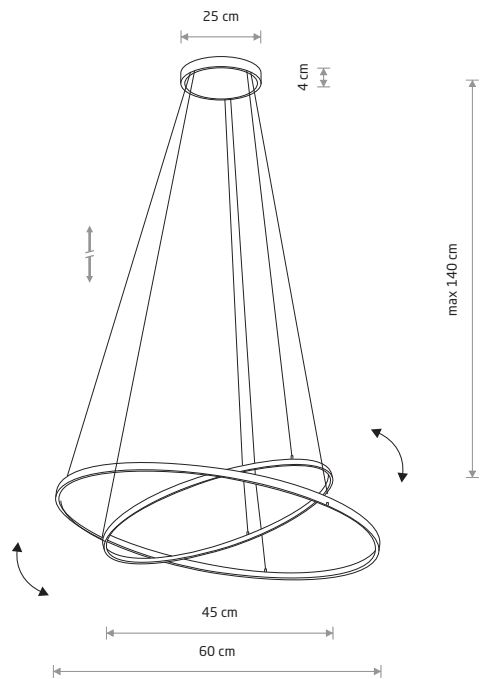
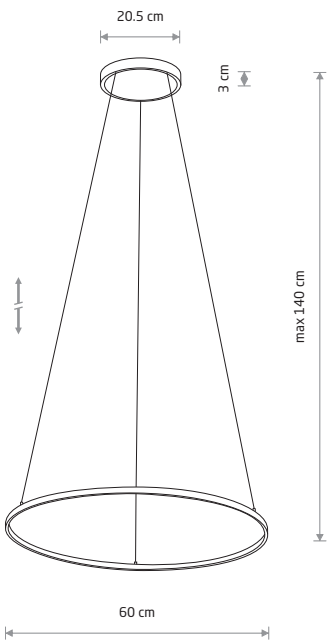
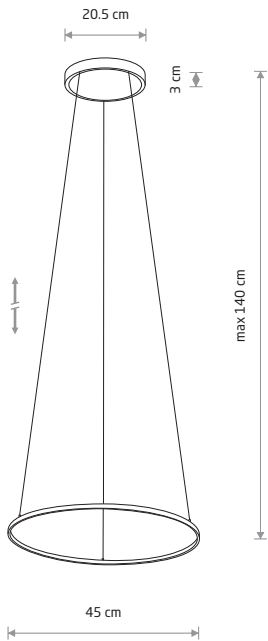


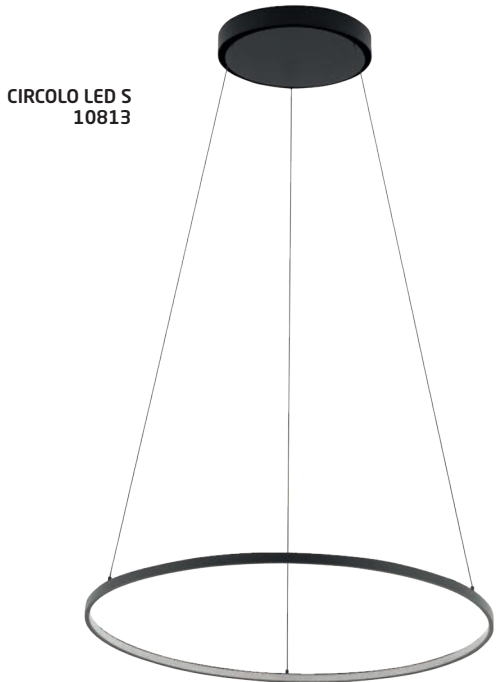

CIRCOLO LED S

painted aluminum, painted steel, plastic PC

10813 3000K

10863 4000K



CIRCOLO LED M

painted aluminum, painted steel, plastic PC

10812 3000K

10862 4000K

11403 3000K

11604 3000K



CIRCOLO LED

painted aluminum, painted steel, plastic PC

10814 3000K

10864 4000K



CIRCOLO POWER LED

painted aluminum, painted steel, plastic PC

11646 3000K

11647 3000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10813	18W LED	3000K	560 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10863	18W LED	4000K	600 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10812	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10862	21W LED	4000K	700 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11403	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11604	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10814	35W LED	3000K	1200 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10864	35W LED	4000K	1300 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11646	67W LED	3000K	3700 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11647	67W LED	3000K	3100 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h

WHITE P004 RAL 9003

SILK OLIVE P031

BLACK P013 RAL 9005

WHITE P004 RAL 9003

BLACK P013 RAL 9005