




CIRCOLO LED
10867



CIRCOLO LED 10816

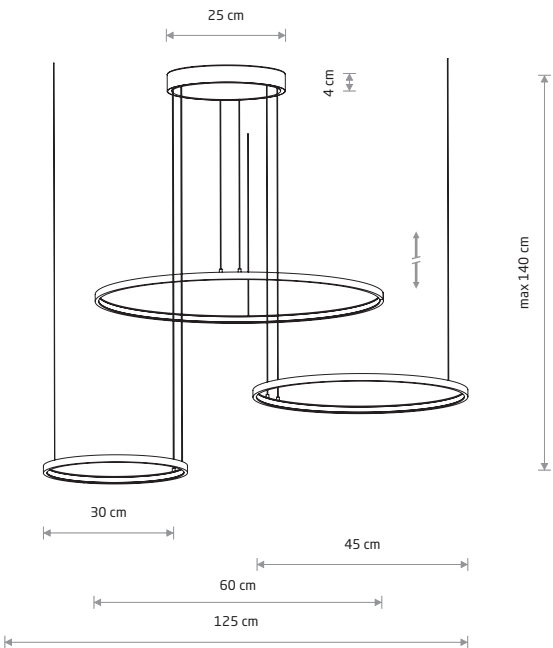



CIRCOLO POWER LED
painted aluminum, painted steel, plastic PC

11649 3000K 11648 3000K



CIRCOLO LED
painted aluminum, painted steel, plastic PC

10817 3000K 10867 4000K
11398 3000K 11602 3000K

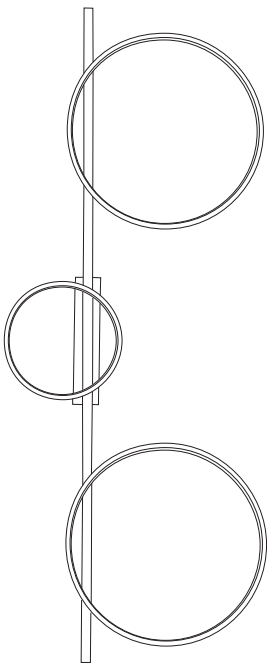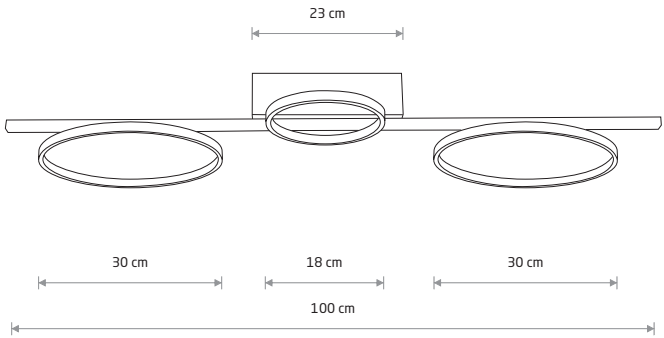

CIRCOLO LED
painted aluminum, painted steel, plastic PC

10816 3000K 10866 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10817	45W LED	3000K	1600 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10867	45W LED	4000K	1800 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11398	45W LED	3000K	1600 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11602	45W LED	3000K	1600 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11648	85W LED	3000K	3750 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11649	85W LED	3000K	4600 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10816	33W LED	3000K	1100 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10866	33W LED	4000K	1200 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h