




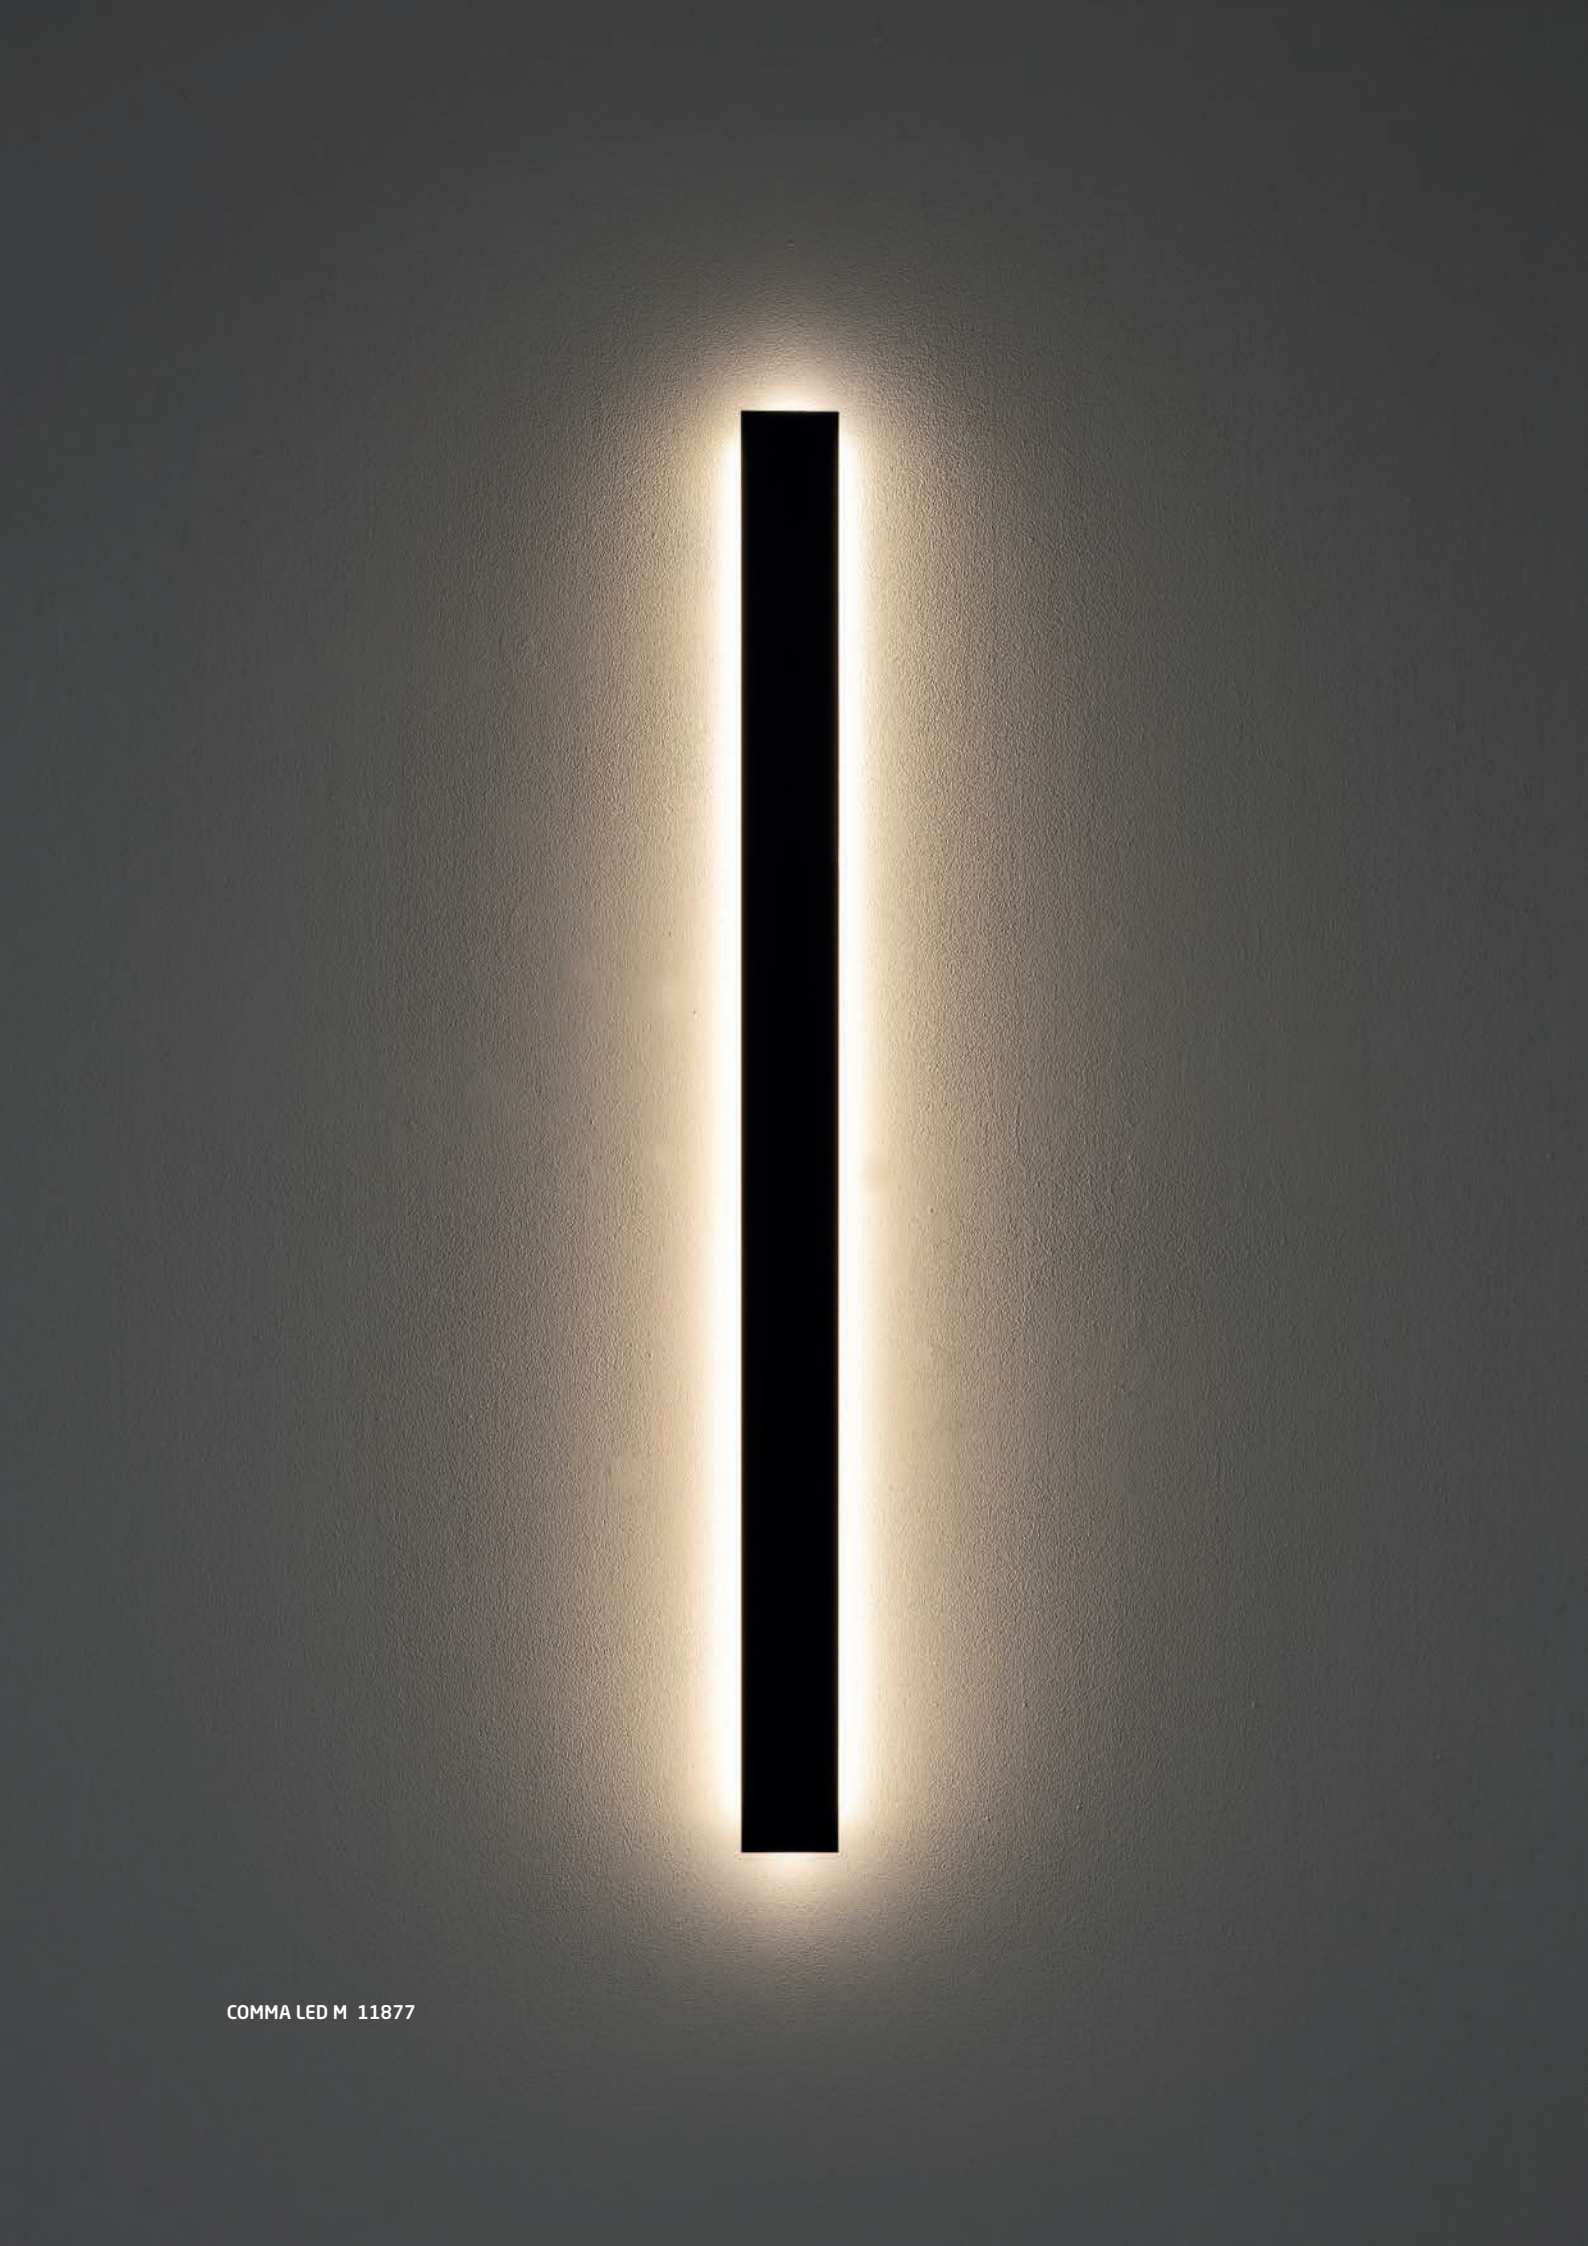


COMMA LED M 11877

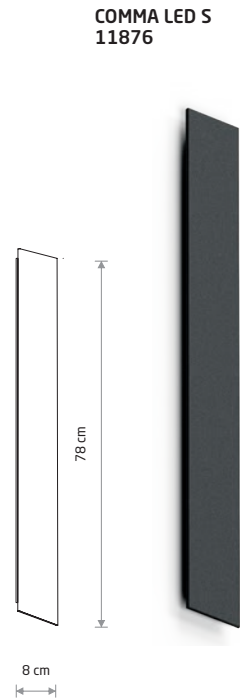

COMMA LED S
painted steel, plastic PC
■ 11876 □ 11884
P

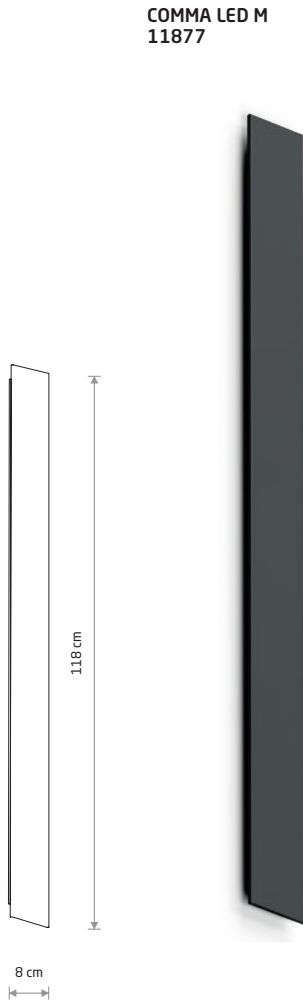

COMMA LED M
painted steel, plastic PC
■ 11877 □ 11883
P

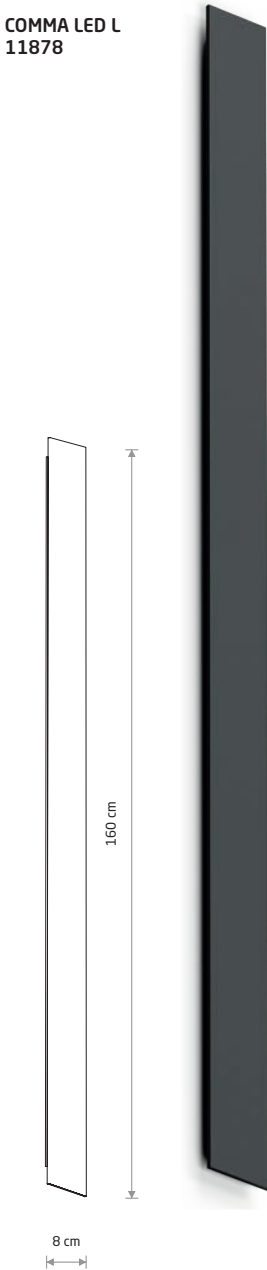

COMMA LED L
painted steel, plastic PC
■ 11878 □ 11882
P

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11876	19W LED	3000K	500 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11884	19W LED	3000K	850 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11877	25W LED	3000K	650 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11883	25W LED	3000K	1200 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11878	34W LED	3000K	950 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11882	34W LED	3000K	1650 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h