




CIRCOLO LED M 11603

CIRCOLO LED M
10815


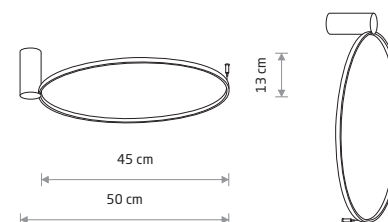


CIRCOLO LED S
painted aluminum, painted steel, plastic PC

■ 10928 3000K ■ 10930 4000K



CIRCOLO LED XS
10858

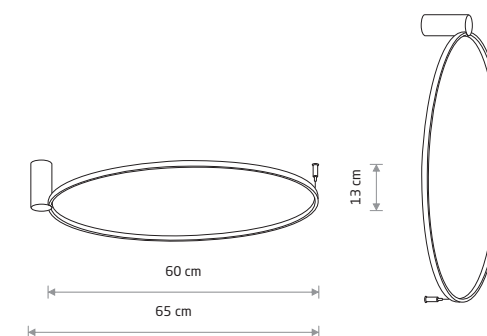

CIRCOLO LED M
painted aluminum, painted steel, plastic PC

■ 10815 3000K ■ 10865 4000K

■ 11402 3000K ■ 11603 3000K



CIRCOLO LED XS
painted aluminum, plastic PC

■ 10808 3000K ■ 10858 4000K

■ 11601 3000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10808	9W LED	3000K	190 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10858	9W LED	4000K	200 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10928	18W LED	3000K	560 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10930	18W LED	4000K	600 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10815	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10865	21W LED	4000K	700 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11402	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11603	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11601	9W LED	3000K	190 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h