




STRAIGHT CEILING LED L 7551



STRAIGHT CEILING LED M 7558



STRAIGHT CEILING LED S 7597



STRAIGHT CEILING LED L


painted steel, plastic PMMA

7551

7556

7600

1xLED TUBE T8, max 22W, included



STRAIGHT CEILING LED M


painted steel, plastic PMMA

7553

7558

7598

1xLED TUBE T8, max 16W, included



STRAIGHT CEILING LED S

painted steel, plastic PMMA

7552

7557

7597

1xLED TUBE T8, max 11W, included




STRAIGHT WALL LED M 7561



STRAIGHT WALL LED S 7568



STRAIGHT WALL XS 7601



STRAIGHT WALL XS


painted steel, plastic PMMA

6345

6350

7601

1xE14, max 10W only LED



STRAIGHT WALL LED S


painted steel, plastic PMMA

7568

7562

7596

1xLED TUBE T8, max 11W, included

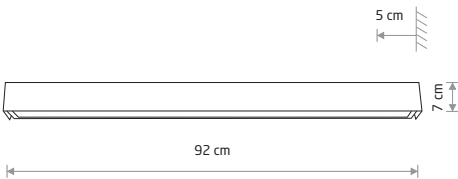

STRAIGHT WALL LED M


painted steel, plastic PMMA

7567

7561

7594

1xLED TUBE T8, max 16W, included

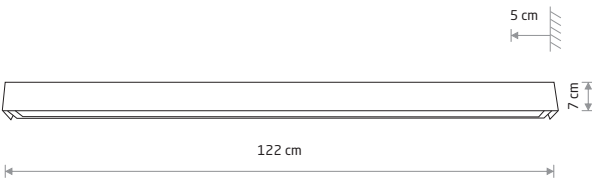

STRAIGHT WALL LED L

painted steel, plastic PMMA

7566

7560

7595

1xLED TUBE T8, max 22W, included

Name	Size	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime	Material
LED TUBE T8	60 cm	11W LED	3000K	1700 lm	120°	≥80	~220-230 V, 50/60 Hz	≥0,5	30000h	CLEAR GLASS
LED TUBE T8	90 cm	16W LED	3000K	2300 lm	120°	≥80	~220-230 V, 50/60 Hz	≥0,5	30000h	CLEAR GLASS
LED TUBE T8	120 cm	22W LED	3000K	3200 lm	120°	≥80	~220-230 V, 50/60 Hz	≥0,5	30000h	CLEAR GLASS

Name	Size	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime	Material
LED TUBE T8	60 cm	11W LED	3000K	1700 lm	120°	≥80	~220-230 V, 50/60 Hz	≥0,5	30000h	CLEAR GLASS
LED TUBE T8	90 cm	16W LED	3000K	2300 lm	120°	≥80	~220-230 V, 50/60 Hz	≥0,5	30000h	CLEAR GLASS
LED TUBE T8	120 cm	22W LED	3000K	3200 lm	120°	≥80	~220-230 V, 50/60 Hz	≥0,5	30000h	CLEAR GLASS