

SOFT WALL LED 60X6 7528



SOFT WALL LED 60X6


painting aluminum, plastic PMMA

7541 7528

1xLED TUBE T8, max 11W, included



SOFT LED 90X6 7535

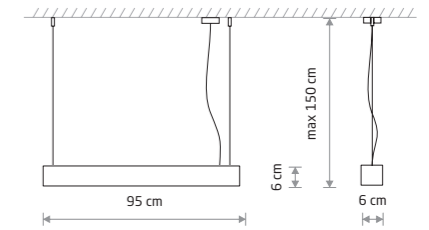


SOFT LED 90X6

painting aluminum, plastic PMMA

7547 7535

1xLED TUBE T8, max 16W, included

SOFT WALL LED 90X6 7534



SOFT WALL LED 90X6


painting aluminum, plastic PMMA

7548 7534

1xLED TUBE T8, max 16W, included



SOFT LED 120X6 7525

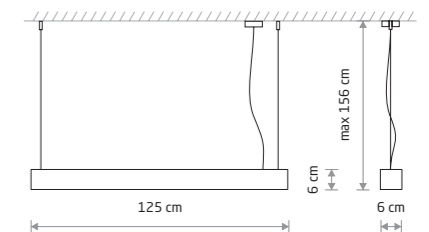

SOFT LED 120X6

painting aluminum, plastic PMMA

7537 7525

1xLED TUBE T8, max 22W, included

Name	Size	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime	Material
LED TUBE T8	60 cm	11W LED	3000K	1700 lm	120°	≥80	~220-230 V, 50/60 Hz	>0,5	30000h	CLEAR GLASS
LED TUBE T8	90 cm	16W LED	3000K	2300 lm	120°	≥80	~220-230 V, 50/60 Hz	>0,5	30000h	CLEAR GLASS
LED TUBE T8	120 cm	22W LED	3000K	3200 lm	120°	≥80	~220-230 V, 50/60 Hz	>0,5	30000h	CLEAR GLASS

Name	Size	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime	Material
LED TUBE T8	60 cm	11W LED	3000K	1700 lm	120°	≥80	~220-230 V, 50/60 Hz	>0,5	30000h	CLEAR GLASS
LED TUBE T8	90 cm	16W LED	3000K	2300 lm	120°	≥80	~220-230 V, 50/60 Hz	>0,5	30000h	CLEAR GLASS
LED TUBE T8	120 cm	22W LED	3000K	3200 lm	120°	≥80	~220-230 V, 50/60 Hz	>0,5	30000h	CLEAR GLASS

WHITE P004 RAL 9003 GRAPHITE P010 RAL 7016

WHITE P004 RAL 9003 GRAPHITE P010 RAL 7016