





NIKKI ROUND LED 48W
11207



NIKKI ROUND LED

painte steel, plastic PMMA


- 11200 3000K
- 11203 4000K
- 11206 3000K
- 11210 4000K



NIKKI ROUND LED

painte steel, plastic PMMA

- 11201 3000K
- 11204 4000K
- 11207 3000K
- 11211 4000K

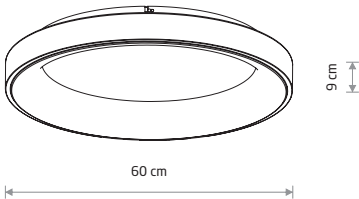

NIKKI ROUND LED

painte steel, plastic PMMA

- 11202 3000K
- 11205 4000K
- 11208 3000K
- 11212 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
11200	32W LED	3000K	2700 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11201	48W LED	3000K	4200 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11202	60W LED	3000K	5400 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11203	32W LED	4000K	2800 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11204	48W LED	4000K	4300 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11205	60W LED	4000K	5600 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11206	32W LED	3000K	2600 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11207	48W LED	3000K	4000 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11208	60W LED	3000K	5200 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11210	32W LED	4000K	2700 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11211	48W LED	4000K	4200 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11212	60W LED	4000K	5400 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h

WHITE BLACK



NIKKI ROUND LED 60W 11202