


ARENA LED 10176




ARENA LED
painted steel, plastic PMMA
10185 10176




KASAI 9490




KASAI 7952

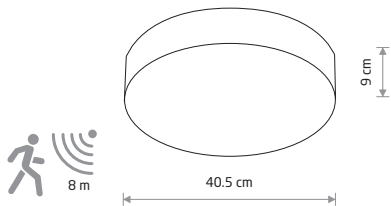

ARENA SENSOR
painted steel, plastic PMMA
10186 10177
3xE14, max 10W only LED



ARENA
painted steel, plastic PMMA
10184 10175
3xE14, max 10W only LED

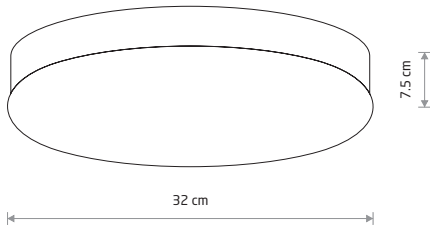

KASAI
chrome plated steel, glass
9490
2xE27, max 10W only LED
brushed stainless steel, glass
9491
2xE27, max 10W only LED
painted steel, glass
7952
2xE27, max 10W only LED

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10185	20W LED	4000K	2200 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h
10176	20W LED	4000K	2200 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h