


CIRCOLO LED S

painting aluminum, painting steel, plastic PC

10810 3000K 10860 4000K

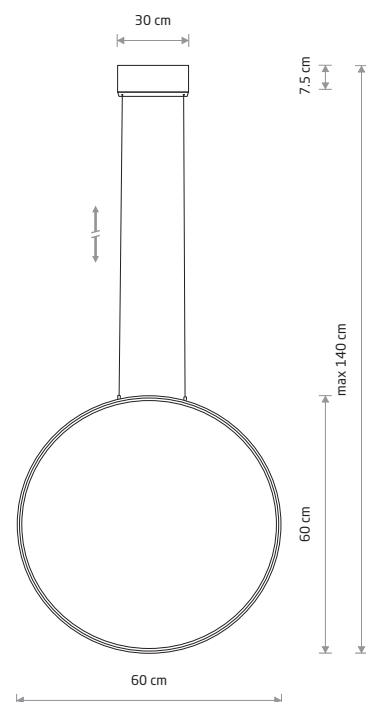

CIRCOLO LED M

painting aluminum, painting steel, plastic PC

10811 3000K 10861 4000K

11401 3000K 11605 3000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10810	18W LED	3000K	560 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10860	18W LED	4000K	600 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10811	21W LED	3000K	660 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10861	21W LED	4000K	700 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11401	21W LED	3000K	660 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11605	21W LED	3000K	660 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

BLACK P013 RAL 9005 SILK OLIVE P031 WHITE P004 RAL 9003



CIRCOLO LED M
11605

Visualisation by Iwona Ligęza