




MIDI LED 10048

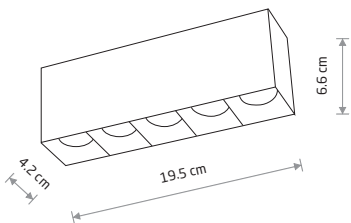

MIDI LED

painted aluminum

- 10048 3000K

10052 4000K
- 10055 3000K
- 10058 4000K




MIDI LED 10051



MIDI LED 10054



MIDI LED 10060

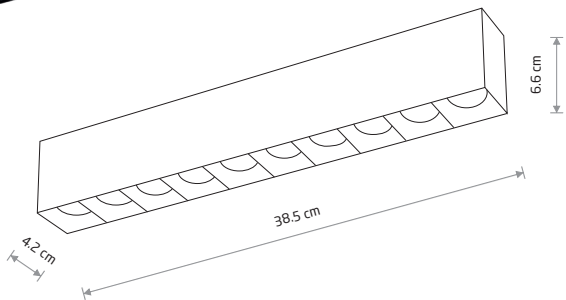


MIDI LED

painted aluminum

- 10050 3000K

10053 4000K
- 10056 3000K
- 10060 4000K

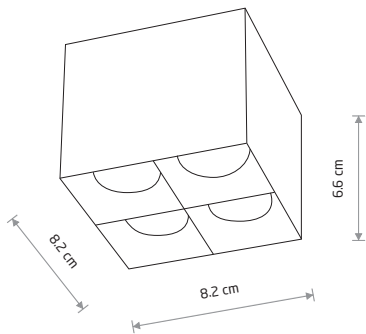

MIDI LED

painted aluminum

- 10054 3000K

10057 4000K
- 10047 3000K
- 10051 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10048	20W LED	3000K	1700 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10052	20W LED	4000K	1700 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10055	20W LED	3000K	1700 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10050	40W LED	3000K	3500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10053	40W LED	4000K	3500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10056	40W LED	3000K	3500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10058	20W LED	4000K	1700 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10060	40W LED	4000K	3500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.9	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10047	16W LED	3000K	1500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10051	16W LED	4000K	1500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10054	16W LED	3000K	1500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10057	16W LED	4000K	1500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h