




MINI LED RECESSED
10043



MINI LED RECESSED
painted aluminum


10042 3000K 10043 4000K



cut out 140×35 mm



MINI LED RECESSED
10045

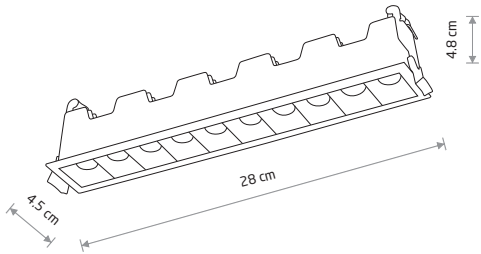

MINI LED RECESSED
painted aluminum

10045 3000K 10046 4000K



cut out 275×35 mm

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10042	10W LED	3000K	600 lm	30 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10043	10W LED	4000K	660 lm	30 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10045	20W LED	3000K	1220 lm	30 °	>90	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10046	20W LED	4000K	1280 lm	30 °	>90	~220-230 V, 50/60 Hz		>0.9	IP20	30000h