





GIAVELLOTTO LED S 11886

GIAVELLOTTO LED S
11886

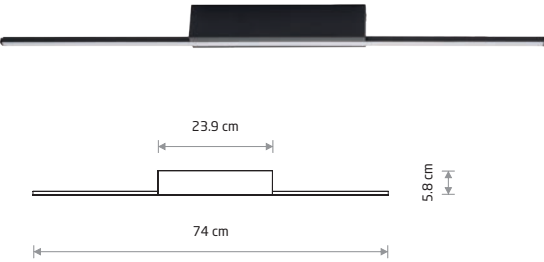


GIAVELLOTTO LED S
painted steel, painted aluminum, plastic PC
■ 11886

GIAVELLOTTO LED M
11887

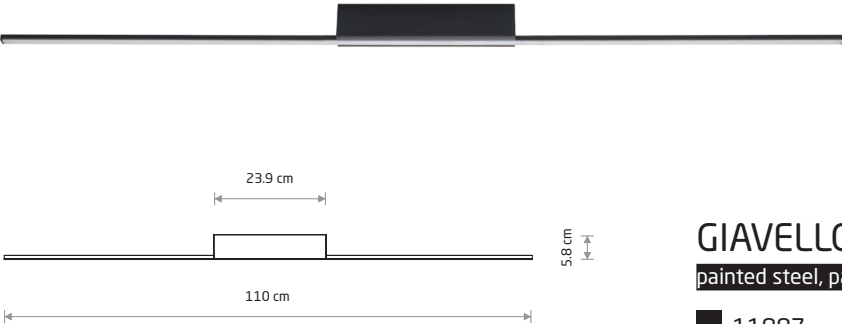

GIAVELLOTTO LED M
painted steel, painted aluminum, plastic PC
■ 11887

GIAVELLOTTO LED L
11888

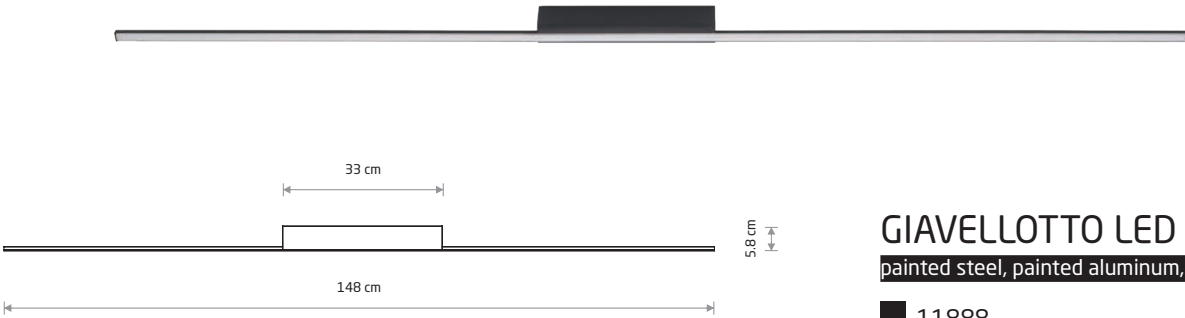

GIAVELLOTTO LED L
painted steel, painted aluminum, plastic PC
■ 11888

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11886	18W LED	3000K	1400 lm	120 °	~220-230 V, 50/60 Hz	>80	⊕	>0.9	IP20	30000h
11887	25W LED	3000K	2000 lm	120 °	~220-230 V, 50/60 Hz	>80	⊕	>0.9	IP20	30000h
11888	35W LED	3000K	2900 lm	120 °	~220-230 V, 50/60 Hz	>80	⊕	>0.9	IP20	30000h