


BAR LED M
11400

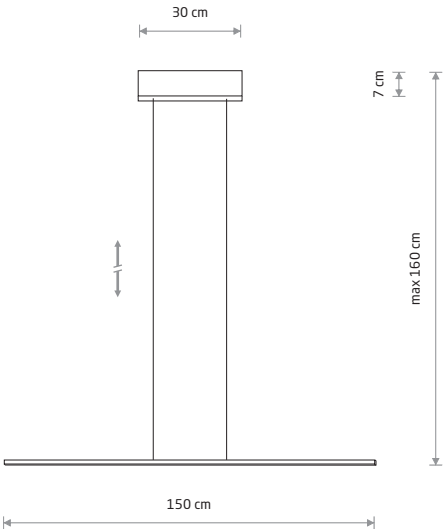


BAR LED M

painted aluminum, painted steel, plastic PMMA

- 10364 3000K

10848 4000K
- 11581 3000K

11582 4000K
- 11400 3000K

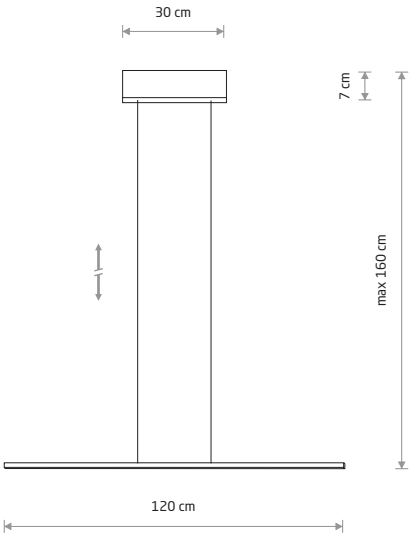


BAR LED S

painted aluminum, painted steel, plastic PMMA

- 11583 3000K

11584 4000K
- 10363 3000K

10847 4000K

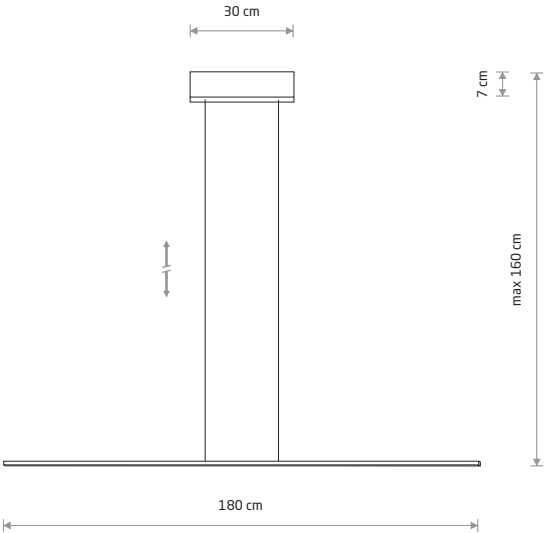

BAR LED L

painted aluminum, painted steel, plastic PMMA

- 10365 3000K

10850 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11583	27W LED	3000K	1700 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11584	27W LED	4000K	1800 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11581	32W LED	3000K	2000 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10363	27W LED	3000K	1200 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10847	27W LED	4000K	1300 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11582	32W LED	4000K	2100 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11400	32W LED	3000K	1600 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10364	32W LED	3000K	1600 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10848	32W LED	4000K	1800 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10365	40W LED	3000K	2200 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10850	40W LED	4000K	2300 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h