




SABER LED M 10312

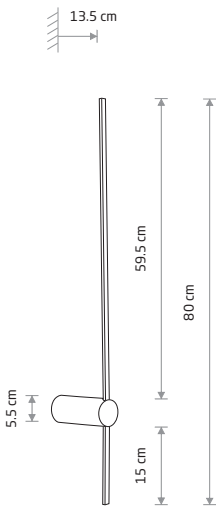

SABER LED M

painted aluminum, painted steel, plastic PC

- 10312 3000K
- 10853 4000K
- 11378 3000K
- 11380 4000K
- 11591 3000K
- 11592 4000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10312	11W LED	3000K	380 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10853	11W LED	4000K	410 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11378	11W LED	3000K	380 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11380	11W LED	4000K	410 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11591	11W LED	3000K	460 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11592	11W LED	4000K	490 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

BLACK P013 RAL 9005

 SILK OLIVE P031

 WHITE P004 RAL 9003

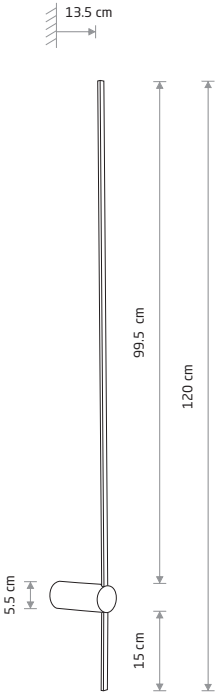

SABER LED L

painted aluminum, painted steel, plastic PC

- 10314 3000K
- 10854 4000K
- 11381 3000K
- 11382 4000K
- 11588 3000K
- 11590 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10314	16W LED	3000K	540 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10854	16W LED	4000K	570 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11381	16W LED	3000K	540 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11382	16W LED	4000K	570 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11588	16W LED	3000K	740 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11590	16W LED	4000K	790 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

BLACK P013 RAL 9005

 SILK OLIVE P031

 WHITE P004 RAL 9003