




PROFILE IRIS LED 7W 8996

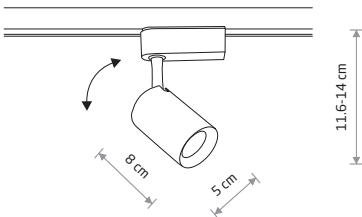

PROFILE IRIS LED 7W

painted aluminum, plastic PC

- 8995

3000K

8997


4000K
- 8996

3000K
- 8998

4000K



PROFILE IRIS LED 12W 9002



PROFILE IRIS LED 12W

painted aluminum, plastic PC

- 9000

3000K

9002


4000K
- 9001

3000K
- 9003

4000K



PROFILE IRIS LED 20W 9005

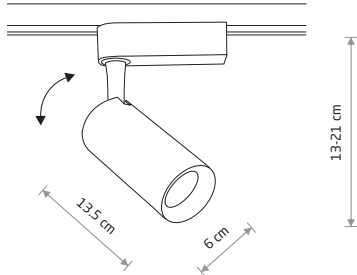

PROFILE IRIS LED 20W

painted aluminum, plastic PC

- 9004

3000K

9006

4000K
- 9005

3000K
- 9007

4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8995	7W LED	3000K	550 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
8996	7W LED	3000K	530 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
8997	7W LED	4000K	560 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
8998	7W LED	4000K	550 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9000	12W LED	3000K	1000 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9001	12W LED	3000K	950 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9002	12W LED	4000K	1100 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9003	12W LED	4000K	1000 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9004	20W LED	3000K	1500 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9005	20W LED	3000K	1400 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9006	20W LED	4000K	1600 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9007	20W LED	4000K	1500 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h

WHITE

BLACK

WHITE

BLACK