




ARM LED L 10856

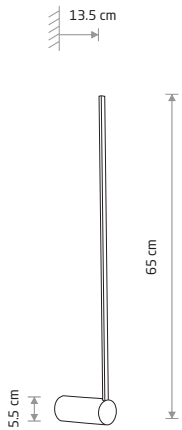


ARM LED M

painted aluminum, plastic PC

10366
3000K

10855
4000K

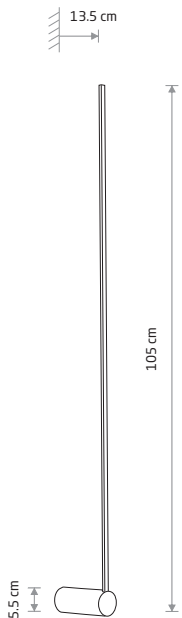

ARM LED L


painted aluminum, plastic PC

10367
3000K

10856
4000K



SLASH LED 11431

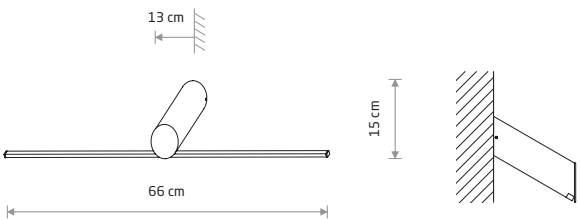

SLASH LED

painted aluminum, painted steel, plastic PC

11431



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10366	10W LED	3000K	360 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10855	10W LED	4000K	390 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10367	14W LED	3000K	520 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10856	14W LED	4000K	550 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11431	10W LED	3000K	360 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h