

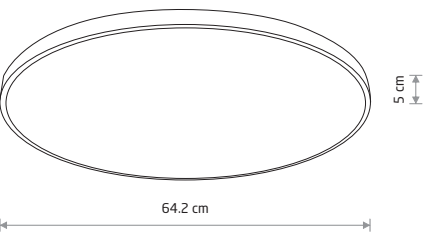




AGNES ROUND LED PRO
10980



AGNES ROUND LED PRO
painted steel, plastic PMMA

- 10977 3000K

10978 4000K
- 10971 3000K

10972 4000K



AGNES ROUND LED PRO
painted steel, plastic PMMA

- 10979 3000K

10980 4000K
- 10973 3000K

10974 4000K



AGNES ROUND LED PRO
painted steel, plastic PMMA

- 10981 3000K

10982 4000K
- 10975 3000K




10976 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
10971	22W LED	3000K	1600 lm	120 °	>80	~220-230 V, 50-60Hz Hz	⊕	IP44	40000h
10972	22W LED	4000K	1800 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10973	32W LED	3000K	2600 lm	120 °	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10974	32W LED	4000K	2700 lm	120 °	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10975	64W LED	3000K	5600 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10976	64W LED	4000K	5900 lm	120 °	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10977	22W LED	3000K	1800 lm	120 °	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10978	22W LED	4000K	2000 lm	120 °	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10979	32W LED	3000K	2800 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10980	32W LED	4000K	3000 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10981	64W LED	3000K	5800 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10982	64W LED	4000K	6200 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h



AGNES SQUARE LED PRO
10987

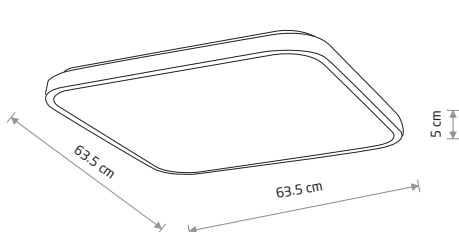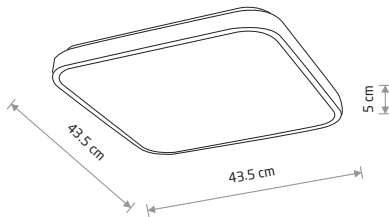

AGNES SQUARE LED PRO
painted steel, plastic PMMA

- 10989 3000K

10990 4000K
- 10983 3000K

10984 4000K



AGNES SQUARE LED PRO
painted steel, plastic PMMA

- 10991 3000K

10992 4000K
- 10985 3000K

10986 4000K



AGNES SQUARE LED PRO
painted steel, plastic PMMA

- 10993 3000K

10994 4000K
- 10987 3000K

10988 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
10983	16W LED	3000K	1200 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10984	16W LED	4000K	1300 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10985	32W LED	3000K	2700 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10986	32W LED	4000K	2800 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10987	64W LED	3000K	5600 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10988	64W LED	4000K	6000 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10989	16W LED	3000K	1400 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10990	16W LED	4000K	1500 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10991	32W LED	3000K	2900 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10992	32W LED	4000K	3100 lm	120 °	>80	~220-230 V, 50/60Hz Hz	⊕	IP44	40000h
10993	64W LED	3000K	6100 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10994	64W LED	4000K	6500 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h