





TEPIC LED 9508



TEPIC LED
painted aluminum
■ 9508



THIKA LED B
painted aluminum, glass
■ 9120

THIKA LED B 9120




MONTERREY LED 9507

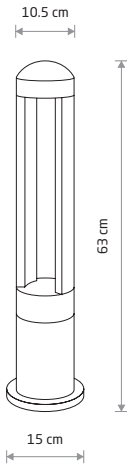

MONTERREY LED
painted aluminum
■ 9507


THIKA LED
painted aluminum, glass
■ 9118

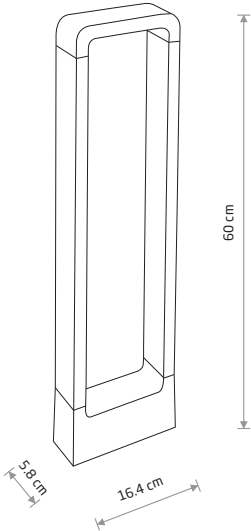THIKA LED 9118

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9508	9W LED	3000K	395 lm	30 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.8	IP54	10000h
9507	9W LED	3000K	410 lm	40 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.8	IP54	10000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9118	9W LED	3000K	550 lm	40 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	20000h
9120	15W LED	3000K	1200 lm	110 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h