




PATHWAY LED PRO 10283

PATHWAY LED PRO

painted steel, painted aluminum, plastic


10283 3000K
 10633 4000K



PATHWAY FOUNDATION KIT

steel


8795



PATHWAY LED S

painted steel, painted aluminum, plastic


9420

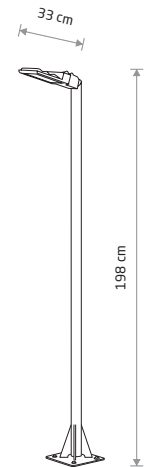

PATHWAY LED M

painted steel, painted aluminum, plastic

9252

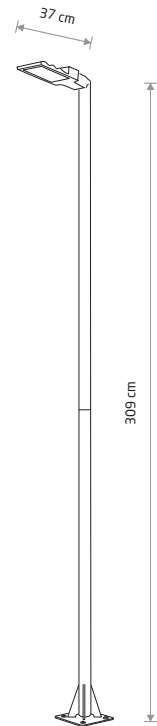

PATHWAY LED L

painted steel, painted aluminum, plastic

9125



PATHWAY LED S 9420

PATHWAY LED M 9252

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10283	60W LED	3000K	5700 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h
10633	60W LED	4000K	5900 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protect	Lifetime
9420	24W LED	3000K	2200 lm	100°	≥ 70	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h
9252	24W LED	3000K	2200 lm	100°	≥ 70	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h
9125	36W LED	3000K	3600 lm	100°	≥ 70	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h