





OUTLINE LED S
11360




OUTLINE LED S
painted aluminum, plastic PC

■ 11360

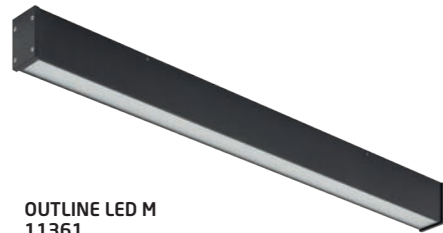


OUTLINE LED M
11361

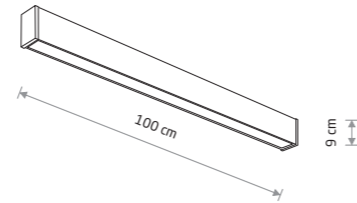


OUTLINE LED M
painted aluminum, plastic PC

■ 11361

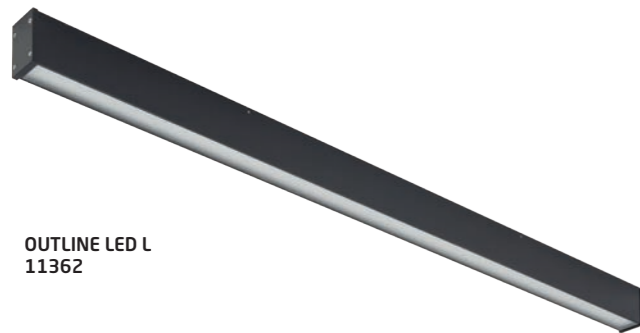

OUTLINE LED L
11362

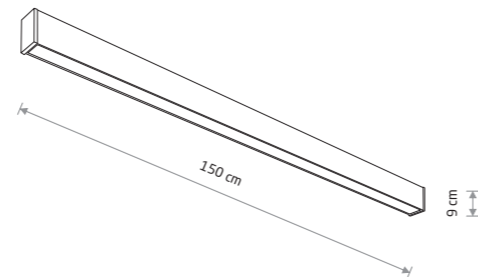

OUTLINE LED L
painted aluminum, plastic PC

■ 11362



OUTLINE LED S 11360

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11360	20W LED	3000K	1200 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP44	30000h
11361	35W LED	3000K	1800 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP44	30000h
11362	50W LED	3000K	3000 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP44	30000h