



BAY LED 8164







BAY LED 8165



SIDEWALK SQUARE LED
8148



SIDEWALK ROUND LED
8147

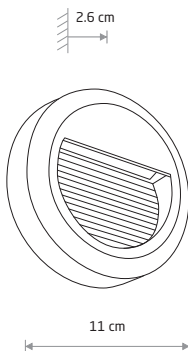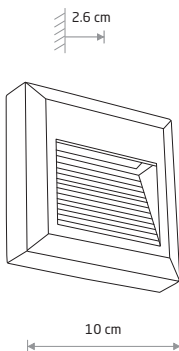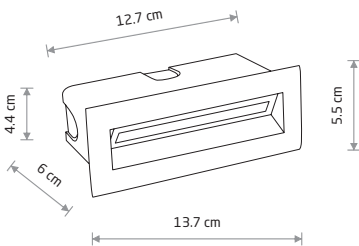

BAY LED

■ painted aluminum, plastic PC

■ 8164



BAY LED

■ painted aluminum, plastic PC

■ 8165



SIDEWALK SQUARE LED

■ painted aluminum, plastic PC

■ 8148



SIDEWALK ROUND LED

■ painted aluminum, plastic PC

■ 8147



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8164	3W LED	3000K	200 lm	70 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP65	10000h
8165	5W LED	3000K	360 lm	70 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP65	10000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8147	3W LED	3000K	100 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	20000h
8148	3W LED	3000K	100 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	20000h