


QUARTZ 3411

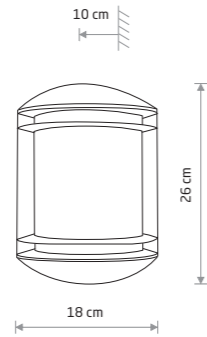

QUARTZ

■ painted aluminum, plastic PC


■ 3411

■ 1xE27, max 10W only LED

IP21



BRICK 3408

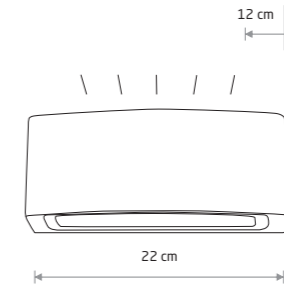


BRICK

■ painted aluminum, glass


■ 3408

■ 1xE27, max 25W only LED

IP65

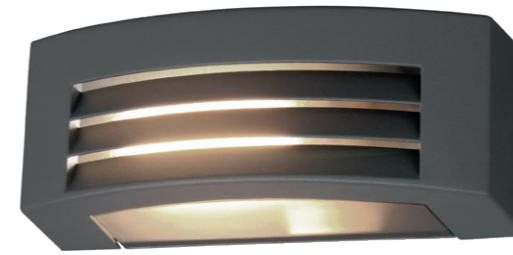

ORINOKO 4387

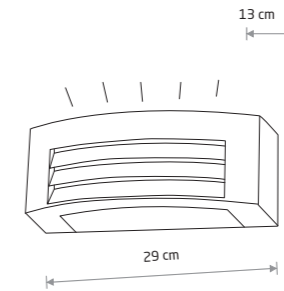

ORINOKO


■ painted aluminum, plastic PC

■ 4387

■ 1xE27, max 10W only LED

IP44

INDUS 4440



INDUS

■ painted aluminum, glass


■ 4440

■ 2xE27, max 10W only LED

IP44



UNIT LED 9122

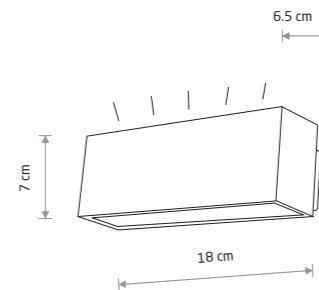

UNIT LED

■ painted aluminum

■ 9122

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9122	2x5W LED	3000K	727 lm	110°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h