


STRAIGHT LED WALL L 9612 WH






STRAIGHT LED WALL M 9617 GR



STRAIGHT LED WALL S 9613 SI

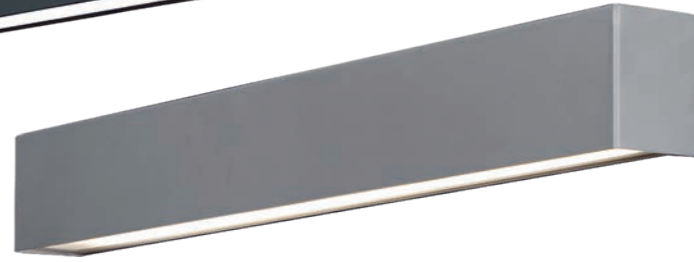

STRAIGHT WALL XS 6345 WH

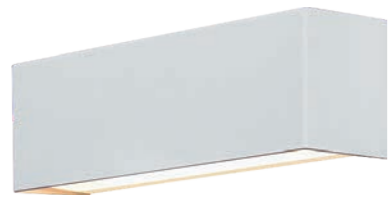

## STRAIGHT WALL XS

stal lakierowana / painted steel / лакирована сталь

6345 ○ WH 6354 ○ SI 6350 ● GR



Ⓢ 1×E14, max 40W

## STRAIGHT LED WALL S

stal lakierowana / painted steel / лакирована сталь

9610 ○ WH 9613 ○ SI 9618 ● GR

Ⓢ T8, 11W LED, included

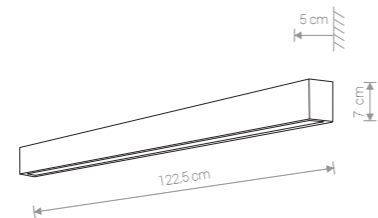

## STRAIGHT LED WALL M

stal lakierowana / painted steel / лакирована сталь

9611 ○ WH 9614 ○ SI 9617 ● GR

Ⓢ T8, 16W LED, included

## STRAIGHT LED WALL L

stal lakierowana / painted steel / лакирована сталь


9612 ○ WH 9615 ○ SI 9616 ● GR

Ⓢ T8, 22W LED, included

NAME	SIZE	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI >)	INPUT	POWER FACTOR	LIFETIME	MATERIAL
LED TUBE T8	60 cm	11W	3000K	950-1000 lm	200°	80	~230V, 50Hz	> 0,9	25 000 h	CLEAR GLASS
LED TUBE T8	90 cm	16W	3000K	1400-1500 lm	200°	80	~230V, 50Hz	> 0,9	25 000 h	CLEAR GLASS
LED TUBE T8	120 cm	22W	3000K	2000-2100 lm	200°	80	~230V, 50Hz	> 0,9	25 000 h	CLEAR GLASS



H LED 8908 WH

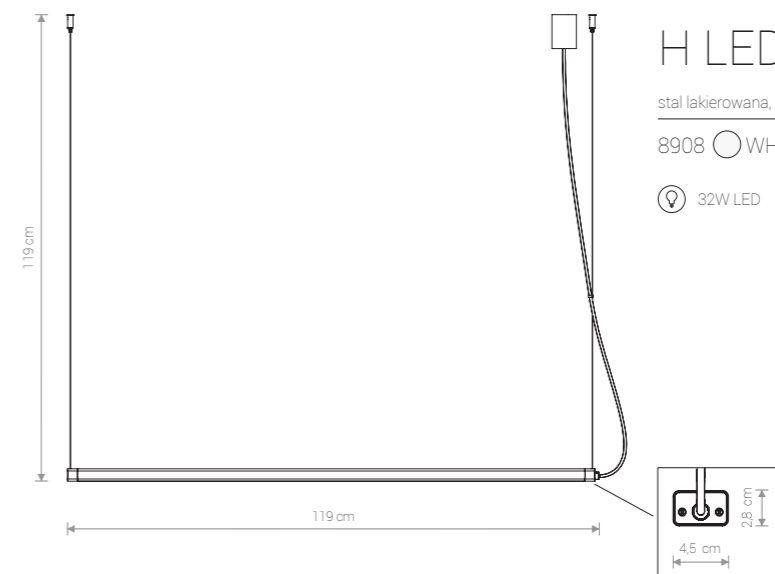

## H LED

stal lakierowana, PC / painted steel, PC / лакированная сталь, PC

8908 ○ WH 8910 ● WH/BL

Ⓢ 32W LED

Item No.	INPUT POWER	COLOUR TEMP.	LUMINOUS FLUX	LUMINAIRE EFFICIENCY	COLOUR RENDERING INDEX (CRI >)	INPUT	LIFETIME
8908, 8910	36W LED	3000K	2700 lm	75	80	~230V, 50Hz	50 000 h