


## SIDEWALK ROUND LED

aluminium, PC / aluminium, PC / алюминий, PC


8147 ● BL

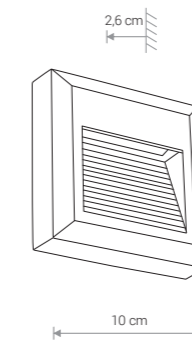

## SIDEWALK SQUARE LED

aluminium, PC / aluminium, PC / алюминий, PC


8148 ● BL

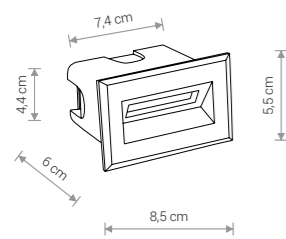

## BAY LED S

aluminium, PC / aluminium, PC / алюминий, PC

8164 ● BL

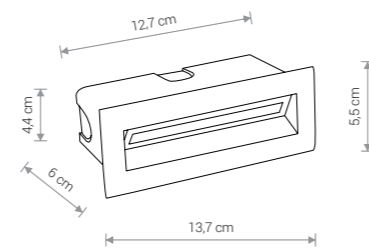

## BAY LED M

aluminium, PC / aluminium, PC / алюминий, PC

8165 ● BL

| Item No. | POWER | COLOUR TEMP. | LUMINOUS FLUX | BEAM ANGLE | COLOUR RENDERING INDEX (CRI ≥) | INPUT              | POWER FACTOR | SAFETY CLASS | INGRESS PROTECTION | LIFETIME |
|----------|-------|--------------|---------------|------------|--------------------------------|--------------------|--------------|--------------|--------------------|----------|
| 8164     | 3W    | 3000K        | 220 lm        | 54°        | 80                             | ~220-230V, 50/60Hz | 0,5          | ⊕            | IP65               | 10 000h  |
| 8165     | 5W    | 3000K        | 380 lm        | 51°        | 80                             | ~220-230V, 50/60Hz | 0,5          | ⊕            | IP65               | 10 000h  |

| Item No. | POWER | COLOUR TEMP. | LUMINOUS FLUX | BEAM ANGLE | COLOUR RENDERING INDEX (CRI ≥) | INPUT              | POWER FACTOR | SAFETY CLASS | INGRESS PROTECTION | LIFETIME |
|----------|-------|--------------|---------------|------------|--------------------------------|--------------------|--------------|--------------|--------------------|----------|
| 8147     | 1,6W  | 3000K        | 61 lm         | 120°       | 80                             | ~220-230V, 50/60Hz | 0,5          | ⊕            | IP54               | 20 000h  |
| 8148     | 1,6W  | 3000K        | 61 lm         | 120°       | 80                             | ~220-230V, 50/60Hz | 0,5          | ⊕            | IP54               | 20 000h  |