




MIDI LED RECESSED
10064

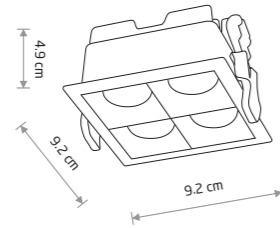

MIDI LED RECESSED


■ painted aluminum

■ 10061 3000K ■ 10064 4000K





✓ cut out 85×85 mm

MIDI LED RECESSED
10062

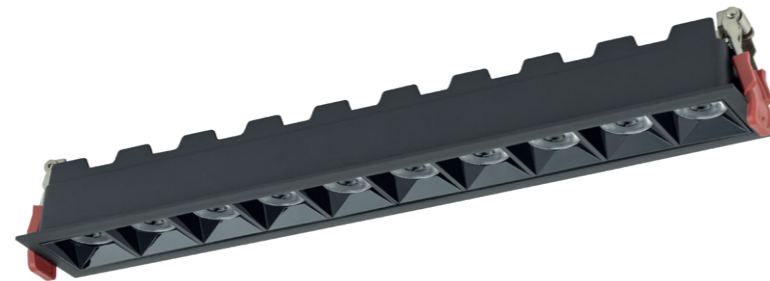

MIDI LED RECESSED
10063

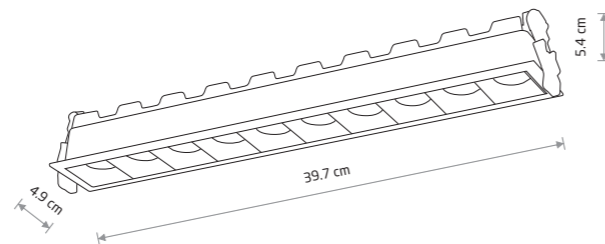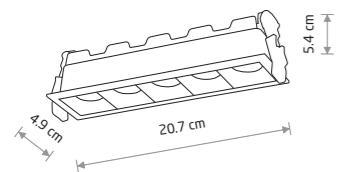

MIDI LED RECESSED

■ painted aluminum

■ 10062 3000K ■ 10065 4000K



✓ cut out 200×45 mm

MIDI LED RECESSED

■ painted aluminum

■ 10063 3000K ■ 10066 4000K



✓ cut out 390×45 mm

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10061	16W LED	3000K	1400 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10064	16W LED	4000K	1400 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10062	20W LED	3000K	1800 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10065	20W LED	4000K	1800 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10063	40W LED	3000K	3300 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10066	40W LED	4000K	3300 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h

■ BLACK

