




CTLS TINOS LED 30W
10398

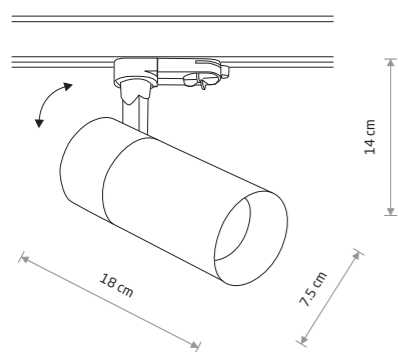

CTLS TINOS LED 30W

painted aluminum, plastic

□ 10392 3000K □ 10395 4000K

■ 10398 3000K ■ 10401 4000K



CTLS TINOS LED 30W
10401

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10392	30W LED	3000K	2800 lm	36°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10395	30W LED	4000K	3000 lm	36°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10398	30W LED	3000K	2600 lm	36°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10401	30W LED	4000K	2900 lm	36°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h

□ WHITE ■ BLACK