





PICASSO LED M 8131


**PICASSO LED**

chrome plated aluminum, plastic PC

8131

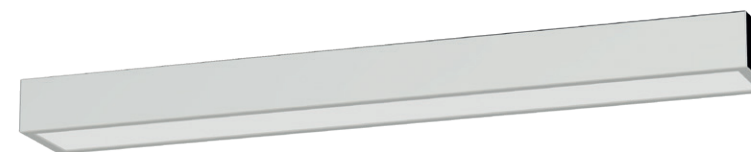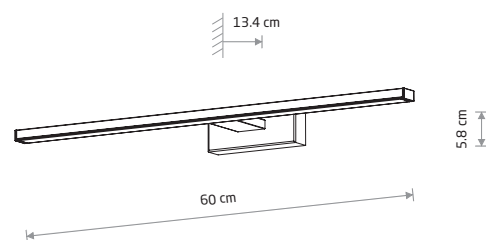

KAGERA LED M 9503

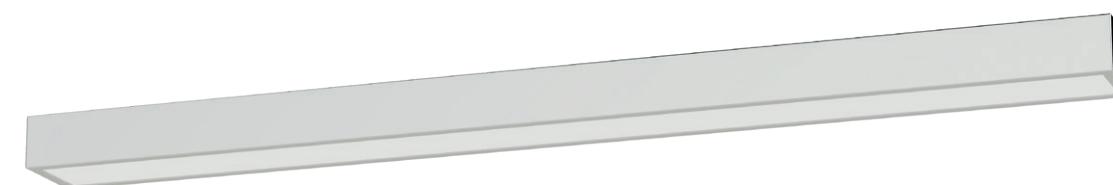

KAGERA LED L 9502





LATH LED M 8175

**LATH LED**

chrome plated steel, plastic PC


8175

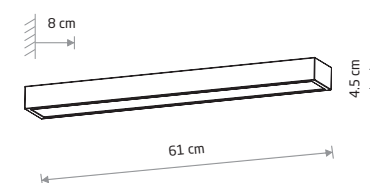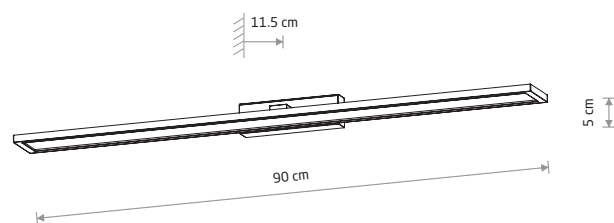

**KAGERA LED M**

chrome plated aluminum, glass

9503

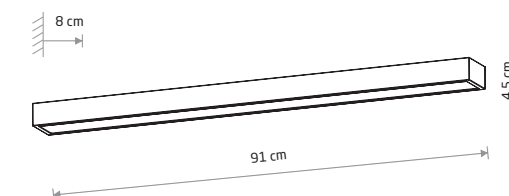

**KAGERA LED L**

chrome plated aluminum, glass

9502



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8131	12W LED	4000K	900 lm	120°	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	30000h
8175	16W LED	4000K	1000 lm	120°	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	20000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9502	24W LED	4000K	1380 lm	120°	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	20000h
9503	18W LED	4000K	1000 lm	120°	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	20000h