


## STRUCTURE LED

aluminium, PC / aluminium, PC / алюминий, PC

8146 ● BL

**STRUCTURE LED** 8146 BL




## SYMMETRY LED

aluminium / aluminium / алюминий

8176 ● GR

**SYMMETRY LED** 8176 GR

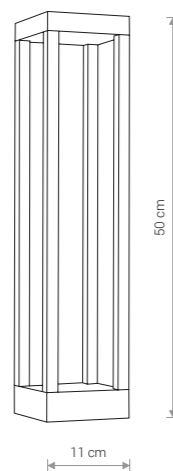


## STRUCTURE LED

aluminium, PC / aluminium, PC / алюминий, PC

8145 ● BL

**STRUCTURE LED** 8145 BL

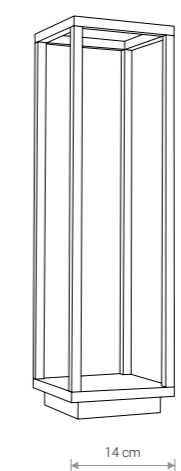

## SYMMETRY LED

aluminium / aluminium / алюминий

8180 ● GR

**SYMMETRY LED** 8180 GR

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	POWER FACTOR	SAFETY CLASS	INGRESS PROTECTION	LIFETIME
8145	13W	3000K	820 lm	120°	80	~220-230V, 50/60Hz	0,9	⊕	IP54	20 000h
8146	13W	3000K	820 lm	120°	80	~220-230V, 50/60Hz	0,9	⊕	IP54	20 000h

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	POWER FACTOR	SAFETY CLASS	INGRESS PROTECTION	LIFETIME
8176	7W	3000K	212 lm	67°	85	~220-230V, 50/60Hz	0,5	⊕	IP54	30 000h
8180	7W	3000K	388 lm	66°	85	~220-230V, 50/60Hz	0,85	⊕	IP54	30 000h